

predrilled stepped hole
7/15 for fixing,
approx 0,6m c-c


compensation profile
RAL gives possibility
of +/- 10mm height
adjustment

upper rail RAL

glazing profile RAL


6 / 8 / 10mm ESG glass

drainage hole 25x6mm
about 1,0-1,2m c-c
(depends on profile length)

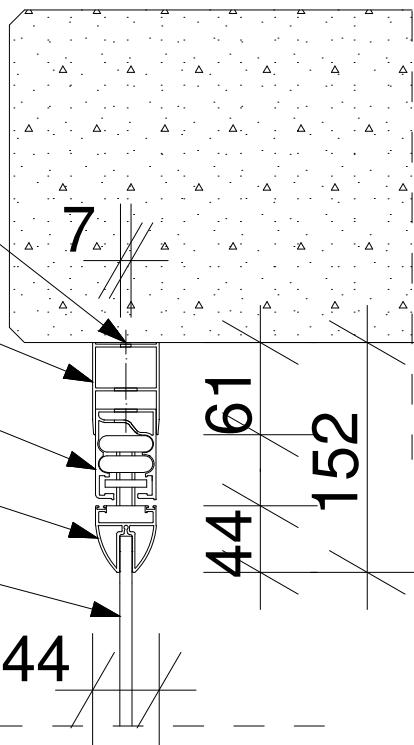


PL2009 handrail

44.2 VSG-ESG glass
or
55.2 VSG glass

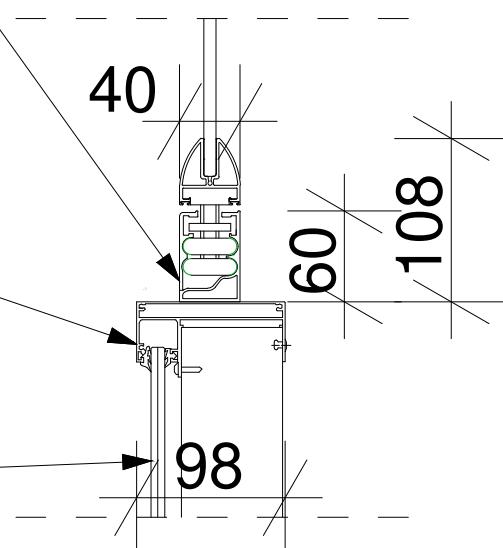

P2005 post 35x67mm
max. spacing 1,0m*

"cover angle"
(milled and fixed to
front face of post or
straight cut and
fixed between posts)

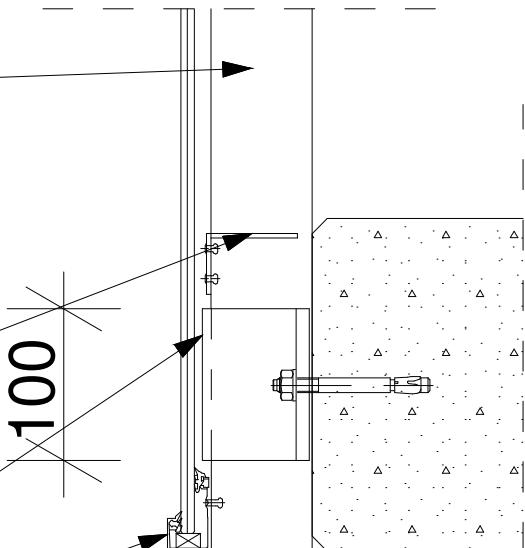

"omega" bracket
with 2x M10 bolts,
post fixed against slab

PL2004 glazing profile